

The answer to increasing accuracy requirements and miniaturisation of the workpieces

Optional also with counter-spindle or as double spindle machine

## Technical data:

Tool holder system  
Disc type tool turret


6-fold milling unit, 90° swivelling  
Bar capacity  
Spindle speed  
Control system  
Dimensions L x W x H

Linear (set-up times optimised)  
VDI 20/25 – 12 positions  
optional 6 positions with individual drive 6.000 rpm  
18.000 rpm  
Main spindle 16/26 mm  
Main spindle and counter spindle up to 15.000 rpm  
SIEMENS / Fanuc  
Approx. 2,1 x 1,1 x 1,9 m (B1-B5)  
Approx. 2,1 x 1,3 x 2,0 m (B6)




## Machine variants:


**B1**

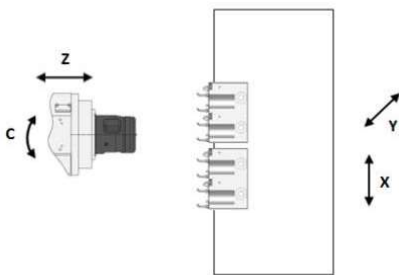


**B2**

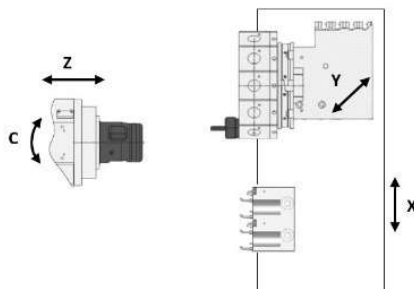

**B3**

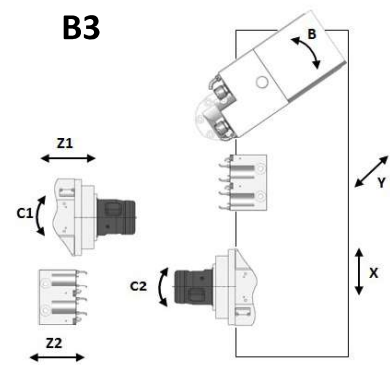

**B5**



**B6**

